


Date	Version	Description
10/08/2019	1.0E	Initial version published. QN48P and QN48G packages supported.
04/16/2020	1.01E	The location of pin 25 in QN48P and QN48G packages modified.
05/29/2020	1.02E	The descriptions of pin GCLK modified; Recommended operating conditions of VCCO0 and VCCO1 when using FLASH modified. Recommended operating conditions of VCCX added.
10/20/2022	1.1E	Pin definitions sheet updated. The note in Power sheet updated.
05/04/2023	1.1.1E	The note of QN48P/QN48G in Power sheet added. The description of CLKHOLD_N pin in Pin Definitions sheet updated.
06/30/2023	1.1.2E	The descriptions of pin definitions and info. for MODE0, MODE1, MODE2 pins optimized.
11/15/2024	1.1.3E	The description of EPAD pin in Pin Definitions sheet added. The I/O descriptions of Ready and Done pins in Pin Definitions sheet optimized.

Pin Name	I/O	Description
User I/O		
IO[End][Row/Column Number][A/B]	I/O	<p>[End] indicates the pin location, including L(left), R(right), B(bottom), and T(top).</p> <p>[Row/Column Number] indicates the pin row/column number. If [End] is T(top) or B(bottom), the pin indicates the column number of the corresponding CFU. If [End] is L(left) or R(right), the pin indicates the row number of the corresponding CFU.</p> <p>[A/B] indicates differential signal pair information.</p>
Multi-Function Pins		
IO[End][Row/Column Number][A/B]/MMM		/MMM represents one or more of the other functions in addition to being general purpose user I/O. When these functions are not in use, these pins can be used as user I/O.
D0	I/O	Data port D0 in CPU mode
D1	I/O	Data port D1 in CPU mode
D2	I/O	Data port D2 in CPU mode
D3	I/O	Data port D3 in CPU mode
D4	I/O	Data port D4 in CPU mode
D5	I/O	Data port D5 in CPU mode
D6	I/O	Data port D6 in CPU mode
D7	I/O	Data port D7 in CPU mode
WE_N	I	Select data input/output of D[7:0] in CPU mode.0: Write;1: Read.
DOUT	O	Data output in SERIAL mode
DIN	I, internal weak pull-up	Data input in SERIAL mode
TMS	I, internal weak pull-up	Serial mode input in JTAG mode
TCK	I	Serial clock input in JTAG mode
TDO	O	Serial data output in JTAG mode
TDI	I, internal weak pull-up	Serial data input in JTAG mode
JTAGSEL_N	I, internal weak pull-up	Reconfigure JTAG download function signal
RECONFIG_N	I, internal weak pull-up	Global reset GowinCONFIG logic signal, active low
FASTRD_N	I	Access SPI FLASH to select signal. Low, Fast Read mode; High, Read mode.
DONE ^[1]	O, internal weak pull-up	High, the programming configuration has been completed successfully; Low, the programming configuration has not been completed or failed.
	I, internal weak pull-up	When the DONE signal is low, delay the chip to activate. Activate the chip until the DONE signal is high.
READY ^[1]	I/O, internal weak pull-up	High, the device can be programmed and configured currently; Low, the device cannot be programmed and configured currently.
MI	I	MI in MSPI mode

Pin Name	I/O	Description
MO	O	MO in MSPI mode
MCS_N	O	Enable signal MCS_N in MSPI mode, active-low
MCLK	O	Clock output MCLK in MSPI mode, with default frequency of 2.5Mhz
SCLK	I	Clock input in SSPI, SERIAL, and CPU modes
SO	O	SO in SSPI mode
SI	I/O	SI in SSPI mode
SSPI_CS_N	I/O	Enable signal SSPI_CS_N in SSPI mode, active-low, and internal weak pull-up
CLKHOLD_N	I, internal weak pull-up	Active-high in SSPI mode; Active-low in CPU mode.
GCLKC_[x]	I	Differential input pin of GCLKT_[x], C(Comp), [x] is global clock number ^[2]
GCLKT_[x]	I	Global clock input pin, T(True), [x] is global clock number
LPLL_C_fb/RPLL_C_fb	I	Left/Right PLL feedback input pin, C(Comp)
LPLL_T_fb/RPLL_T_fb	I	Left/Right PLL feedback input pin, T(True)
LPLL_C_in/RPLL_C_in	I	Left/Right PLL clock input pin, C(Comp)
LPLL_T_in/RPLL_T_in	I	Left/Right PLL clock input pin, T(True)
MODE2	I, internal weak pull-up	GowinCONFIG modes selection pin; if this pin is marked as "VCCIO", it's internally powered; if this pin is marked as "GND", it's internally grounded.
MODE1	I, internal weak pull-up	GowinCONFIG modes selection pin; if this pin is marked as "VCCIO", it's internally powered; if this pin is marked as "GND", it's internally grounded.
MODE0	I, internal weak pull-up	GowinCONFIG modes selection pin; if this pin is marked as "VCCIO", it's internally powered; if this pin is marked as "GND", it's internally grounded.
Other Pins		
NC	NA	Reserved
VSS	NA	Ground
VCC	NA	Power supply pin of core voltage
VCCIO#	NA	Power supply pin of I/O voltage for I/O BANK#
VCCX	NA	Power supply pin of auxiliary voltage
EPAD	NA	Exposed pad. Connect to ground.
Note!		
^[1] The default state of READY/DONE is open-drain output, internal weak pull-up. DONE outputs 0 during configuration.		
^[2] When the input is single-ended, GCLKC_[x] pin is not a global clock pin.		

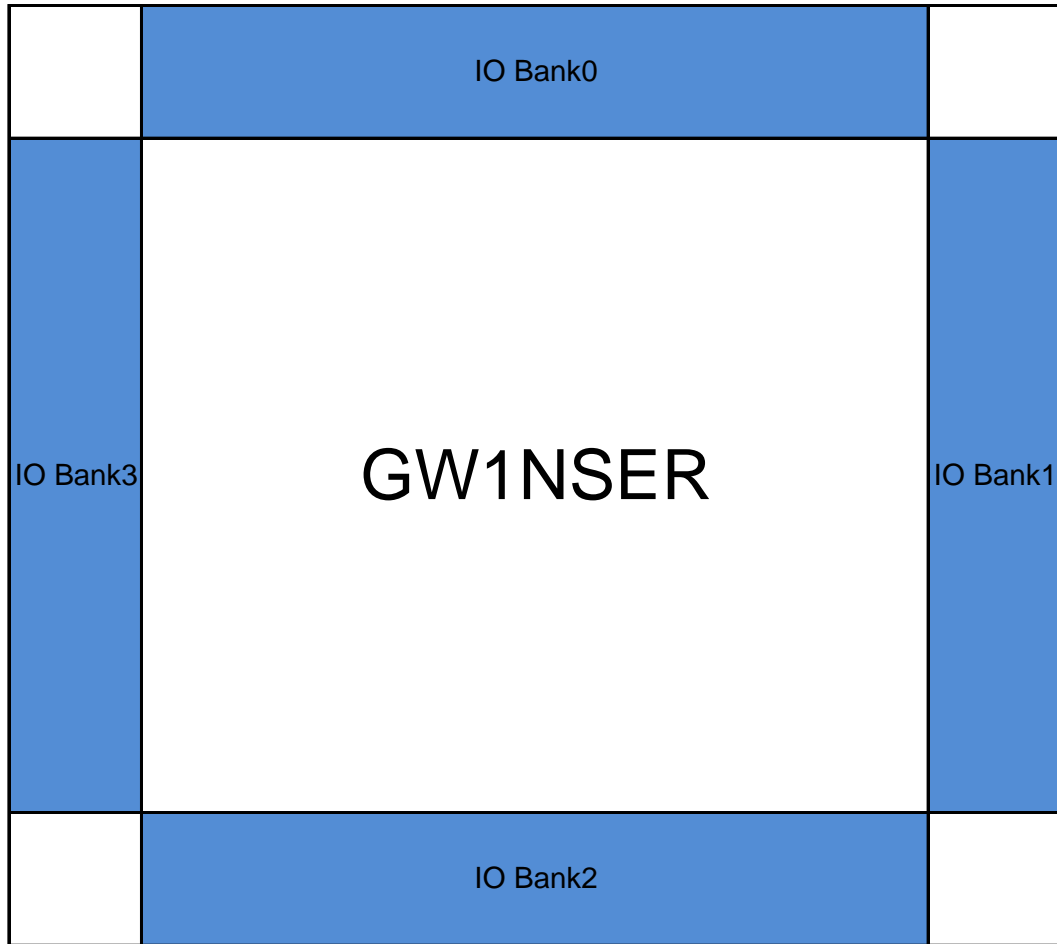

Note!

- [1] Each Bank has independent reference voltage (VREF).
- [2] You can select to use IOB internal VREF (equals to $0.5 * VCCIO$).
- [3] You can also select to use external VREF input (use any I/O pins as external VREF input).

Note! VCCX should be greater than or equal to VCCIO.			
Recommended Operating Conditions of QN48P Package in GW1NSER-4C			
Name	Description	Min.	Max.
VCC	Core voltage	1.14V	1.26V
VCCIO0, VCCIO1, VCCIO2, VCCIO3	I/O Bank power supply voltage	1.14V	3.6V
	When PSRAM is used, VCCIO3 provides voltage for PSRAM.	1.71V	1.89V
	When MIPI input is used in BANK0 and BANK1, VCCIO0 and VCCIO1 should provide 1.2V	1.14V	1.26V
	When MIPI output is used in BANK2, VCCIO2 should provide 1.2V voltage.	1.14V	1.26V
VCCX	Auxiliary voltage	1.71V	3.6V
Note! It is highly recommended that the EPAD connect to GND, but not a requirement.			
Recommended Operating Conditions of QN48G Package in GW1NSER-4C			
Name	Description	Min.	Max.
VCC	Core voltage	1.14V	1.26V
VCCIO0, VCCIO1, VCCIO2, VCCIO3	I/O Bank power supply voltage	1.14V	3.6V
	When Flash is used, VCCIO0 and VCCIO1 provide voltage for Flash.	2.565V	3.6V
	When MIPI input is used in BANK0 and BANK1, VCCIO0 and VCCIO1 should provide 1.2V	1.14V	1.26V
	When MIPI output is used in BANK2, VCCIO2 should provide 1.2V voltage.	1.14V	1.26V
VCCX	Auxiliary voltage	1.71V	3.6V
Note! It is highly recommended that the EPAD connect to GND, but not a requirement.			

Note!

^[1] Package QN48P is embedded with PSRAM, package QN48G is embedded with Flash.

^[2] The pin is internally grounded.

Pin Name	Function	BANK	Configuration Function	Differential Pair	LVDS	X16	QN48P	QN48G
IOB13A	I/O	3		True_of_IOB13B	NONE	NONE	18	18
IOB13B	I/O	3		Comp_of_IOB13A	NONE	NONE	19	19
IOB14A	I/O	3		True_of_IOB14B	NONE	NONE		
IOB14B	I/O	3		Comp_of_IOB14A	NONE	NONE		
IOB15A	I/O	3		True_of_IOB15B	NONE	NONE		
IOB15B	I/O	3		Comp_of_IOB15A	NONE	NONE		
IOB16A/GCLKT_5	I/O	3	GCLKT_5	True_of_IOB16B	NONE	NONE	20	20
IOB16B/GCLKC_5	I/O	3	GCLKC_5	Comp_of_IOB16A	NONE	NONE	21	21
IOB22A/GCLKT_4	I/O	3	GCLKT_4	True_of_IOB22B	NONE	NONE	22	22
IOB22B/GCLKC_4	I/O	3	GCLKC_4	Comp_of_IOB22A	NONE	NONE	23	23
IOB23A	I/O	3		True_of_IOB23B	NONE	NONE		
IOB23B	I/O	3		Comp_of_IOB23A	NONE	NONE		
IOB24A	I/O	3		True_of_IOB24B	NONE	NONE		
IOB24B	I/O	3		Comp_of_IOB24A	NONE	NONE		
IOB25A	I/O	3		True_of_IOB25B	NONE	NONE		
IOB25B	I/O	3		Comp_of_IOB25A	NONE	NONE		
IOB29A	I/O	3		True_of_IOB29B	NONE	NONE		
IOB29B	I/O	3		Comp_of_IOB29A	NONE	NONE		
IOB4A	I/O	3		True_of_IOB4B	NONE	NONE	13	13
IOB4B	I/O	3		Comp_of_IOB4A	NONE	NONE	14	14
IOB5A	I/O	3		True_of_IOB5B	NONE	NONE	15	15
IOB5B	I/O	3		Comp_of_IOB5A	NONE	NONE		
IOB6A	I/O	3		True_of_IOB6B	NONE	NONE	16	16
IOB6B	I/O	3		Comp_of_IOB6A	NONE	NONE	17	17
IOB7A	I/O	3		True_of_IOB7B	NONE	NONE		
IOB7B	I/O	3		Comp_of_IOB7A	NONE	NONE		
IOR11A/GCLKT_3	I/O	2	GCLKT_3	True_of_IOR11B	TRUE	x16	32	32
IOR11B/GCLKC_3	I/O	2	GCLKC_3	Comp_of_IOR11A	TRUE	NONE	31	31
IOR12A	I/O	2		True_of_IOR12B	NONE	NONE		
IOR12B	I/O	2		Comp_of_IOR12A	NONE	NONE		

Note!

^[1] Package QN48P is embedded with PSRAM, package QN48G is embedded with Flash.

^[2] The pin is internally grounded.

Pin Name	Function	BANK	Configuration Function	Differential Pair	LVDS	X16	QN48P	QN48G
IOR13A	I/O	2		True_of_IOR13B	TRUE	x16		
IOR13B	I/O	2		Comp_of_IOR13A	TRUE	NONE		
IOR14A	I/O	2		True_of_IOR14B	NONE	NONE		
IOR14B	I/O	2		Comp_of_IOR14A	NONE	NONE		
IOR15A	I/O	2		True_of_IOR15B	TRUE	x16	30	30
IOR15B	I/O	2		Comp_of_IOR15A	TRUE	NONE	29	29
IOR16A	I/O	2		True_of_IOR16B	NONE	NONE		
IOR16B	I/O	2		Comp_of_IOR16A	NONE	NONE		
IOR17A	I/O	2		True_of_IOR17B	TRUE	x16	28	28
IOR17B	I/O	2		Comp_of_IOR17A	TRUE	NONE	27	27
IOR18A	I/O	2		True_of_IOR18B	NONE	NONE		
IOR18B	I/O	2		Comp_of_IOR18A	NONE	NONE		
IOR2A/RPLL_T_in	I/O	2	RPLL_T_in	True_of_IOR2B	TRUE	x16	35	35
IOR2B/RPLL_C_in	I/O	2	RPLL_C_in	Comp_of_IOR2A	TRUE	NONE	34	34
IOR3A/RPLL_T_fb	I/O	2	RPLL_T_fb	True_of_IOR3B	NONE	NONE		
IOR3B/RPLL_C_fb	I/O	2	RPLL_C_fb	Comp_of_IOR3A	NONE	NONE		
IOR4A	I/O	2		True_of_IOR4B	TRUE	x16		
IOR4B	I/O	2		Comp_of_IOR4A	TRUE	NONE		
IOR5A	I/O	2		True_of_IOR5B	NONE	NONE		
IOR5B	I/O	2		Comp_of_IOR5A	NONE	NONE		
IOR6A	I/O	2		True_of_IOR6B	TRUE	x16		
IOR6B	I/O	2		Comp_of_IOR6A	TRUE	NONE		
IOR7A	I/O	2		True_of_IOR7B	NONE	NONE		
IOR7B	I/O	2		Comp_of_IOR7A	NONE	NONE		
IOR8A	I/O	2		True_of_IOR8B	TRUE	x16		
IOR8B	I/O	2		Comp_of_IOR8A	TRUE	NONE		
IOR9A/GCLKT_2	I/O	2	GCLKT_2	True_of_IOR9B	NONE	NONE		
IOR9B/GCLKC_2	I/O	2	GCLKC_2	Comp_of_IOR9A	NONE	NONE	33	33
IOT10A/MCLK/D4	I/O	0	MCLK/D4	True_of_IOT10B	NONE	NONE	1	
IOT10B/MCS_N/D5	I/O	0	MCS_N/D5	Comp_of_IOT10A	NONE	NONE	2	

Note!

^[1] Package QN48P is embedded with PSRAM, package QN48G is embedded with Flash.

^[2] The pin is internally grounded.

Pin Name	Function	BANK	Configuration Function	Differential Pair	LVDS	X16	QN48P	QN48G
IOT11A/MO/D6	I/O	1	MO/D6	True_of_IOT11B	NONE	x16	48	
IOT11B/MI/D7	I/O	1	MI/D7	Comp_of_IOT11A	NONE	NONE	47	
IOT12A/DIN/CLKHOLD_N	I/O	1	DIN/CLKHOLD_N	True_of_IOT12B	NONE	NONE		48
IOT12B/DOOUT/WE_N	I/O	1	DOOUT/WE_N	Comp_of_IOT12A	NONE	NONE		47
IOT13A/LPLL_T_in	I/O	1	LPLL_T_in	True_of_IOT13B	NONE	x16	45	45
IOT13B/LPLL_C_in	I/O	1	LPLL_C_in	Comp_of_IOT13A	NONE	NONE	46	46
IOT15A/LPLL_T_fb	I/O	1	LPLL_T_fb	True_of_IOT15B	NONE	x16		
IOT15B/LPLL_C_fb	I/O	1	LPLL_C_fb	Comp_of_IOT15A	NONE	NONE		
IOT17A/GCLKT_0	I/O	1	GCLKT_0	True_of_IOT17B	NONE	x16	43	43
IOT17B/GCLKC_0	I/O	1	GCLKC_0	Comp_of_IOT17A	NONE	NONE	44	44
IOT20A/GCLKT_1	I/O	1	GCLKT_1	True_of_IOT20B	NONE	x16	41	41
IOT20B/GCLKC_1	I/O	1	GCLKC_1	Comp_of_IOT20A	NONE	NONE	42	42
IOT21A	I/O	1		True_of_IOT21B	NONE	NONE		
IOT21B	I/O	1		Comp_of_IOT21A	NONE	NONE		
IOT22A	I/O	1		True_of_IOT22B	NONE	x16		
IOT22B	I/O	1		Comp_of_IOT22A	NONE	NONE		
IOT24A	I/O	1		True_of_IOT24B	NONE	x16		
IOT24B	I/O	1		Comp_of_IOT24A	NONE	NONE		
IOT26A	I/O	1		True_of_IOT26B	NONE	x16	39	39
IOT26B	I/O	1		Comp_of_IOT26A	NONE	NONE	40	40
IOT29A	I/O	1		True_of_IOT29B	NONE	x16		
IOT29B	I/O	1		Comp_of_IOT29A	NONE	NONE		
IOT2A/TDI	I/O	0	TDI	True_of_IOT2B	NONE	x16	3	3
IOT2B/TDO	I/O	0	TDO	Comp_of_IOT2A	NONE	NONE	4	4
IOT30A	I/O	1		True_of_IOT30B	NONE	NONE		
IOT30B	I/O	1		Comp_of_IOT30A	NONE	NONE		
IOT31A	I/O	1		True_of_IOT31B	NONE	x16		
IOT31B	I/O	1		Comp_of_IOT31A	NONE	NONE		
IOT33A	I/O	1		True_of_IOT33B	NONE	x16		
IOT33B	I/O	1		Comp_of_IOT33A	NONE	NONE		

Note!

^[1] Package QN48P is embedded with PSRAM, package QN48G is embedded with Flash.

^[2] The pin is internally grounded.

Pin Name	Function	BANK	Configuration Function	Differential Pair	LVDS	X16	QN48P	QN48G
IOT35A	I/O	1		True_of_IOT35B	NONE	x16		
IOT35B	I/O	1		Comp_of_IOT35A	NONE	NONE		
IOT3A/TMS	I/O	0	TMS	True_of_IOT3B	NONE	NONE	6	6
IOT3B/TCK	I/O	0	TCK	Comp_of_IOT3A	NONE	NONE	7	7
IOT4A/SCLK	I/O	0	SCLK	True_of_IOT4B	NONE	x16	8	8
IOT4B/JTAGSEL_N	I/O	0	JTAGSEL_N	Comp_of_IOT4A	NONE	NONE		
IOT5A/READY	I/O	0	READY	True_of_IOT5B	NONE	NONE		
IOT5B/DONE	I/O	0	DONE	Comp_of_IOT5A	NONE	NONE		
IOT6A/RECONFIG_N	I/O	0	RECONFIG_N	True_of_IOT6B	NONE	x16		
IOT6B/MODE0	I/O	0	MODE0	Comp_of_IOT6A	NONE	NONE	GND ^[2]	GND ^[2]
IOT7A/MODE1	I/O	0	MODE1	True_of_IOT7B	NONE	NONE	GND ^[2]	GND ^[2]
IOT7B/MODE2	I/O	0	MODE2	Comp_of_IOT7A	NONE	NONE	GND ^[2]	GND ^[2]
IOT8A/SSPI_CS_N/D0	I/O	0	SSPI_CS_N/D0	True_of_IOT8B	NONE	x16	9	9
IOT8B/SO/D1	I/O	0	SO/D1	Comp_of_IOT8A	NONE	NONE	10	10
IOT9A/SI/D2	I/O	0	SI/D2	True_of_IOT9B	NONE	NONE		1
IOT9B/FASTRD_N/D3	I/O	0	FASTRD_N /D3	Comp_of_IOT9A	NONE	NONE		2
VCC	Power	N/A					11	11
VCC	Power	N/A					37	37
VCCIO0	Power	N/A					5	5
VCCIO1	Power	N/A					38	38
VCCIO2	Power	N/A					36	36
VCCIO3	Power	N/A					12	12
VCCIO3	Power	N/A					24	24
VCCX	Power	N/A					25	25
VSS	Ground	N/A					26	26

Pin Name	Function	BANK	Configuration Function	Differential Pair	LVDS	X16	QN48P	QN48G
BANK2 True LVDS Pair								
IOR11A/GCLKT_3	I/O	2	GCLKT_3	True_of_IOR11B	TRUE	x16	32	32
IOR11B/GCLKC_3	I/O	2	GCLKC_3	Comp_of_IOR11A	TRUE	NONE	31	31
IOR13A	I/O	2		True_of_IOR13B	TRUE	x16		
IOR13B	I/O	2		Comp_of_IOR13A	TRUE	NONE		
IOR15A	I/O	2		True_of_IOR15B	TRUE	x16	30	30
IOR15B	I/O	2		Comp_of_IOR15A	TRUE	NONE	29	29
IOR17A	I/O	2		True_of_IOR17B	TRUE	x16	28	28
IOR17B	I/O	2		Comp_of_IOR17A	TRUE	NONE	27	27
IOR2A/RPLL_T_in	I/O	2	RPLL_T_in	True_of_IOR2B	TRUE	x16	35	35
IOR2B/RPLL_C_in	I/O	2	RPLL_C_in	Comp_of_IOR2A	TRUE	NONE	34	34
IOR4A	I/O	2		True_of_IOR4B	TRUE	x16		
IOR4B	I/O	2		Comp_of_IOR4A	TRUE	NONE		
IOR6A	I/O	2		True_of_IOR6B	TRUE	x16		
IOR6B	I/O	2		Comp_of_IOR6A	TRUE	NONE		
IOR8A	I/O	2		True_of_IOR8B	TRUE	x16		
IOR8B	I/O	2		Comp_of_IOR8A	TRUE	NONE		