



GW5A-EV60PG324C

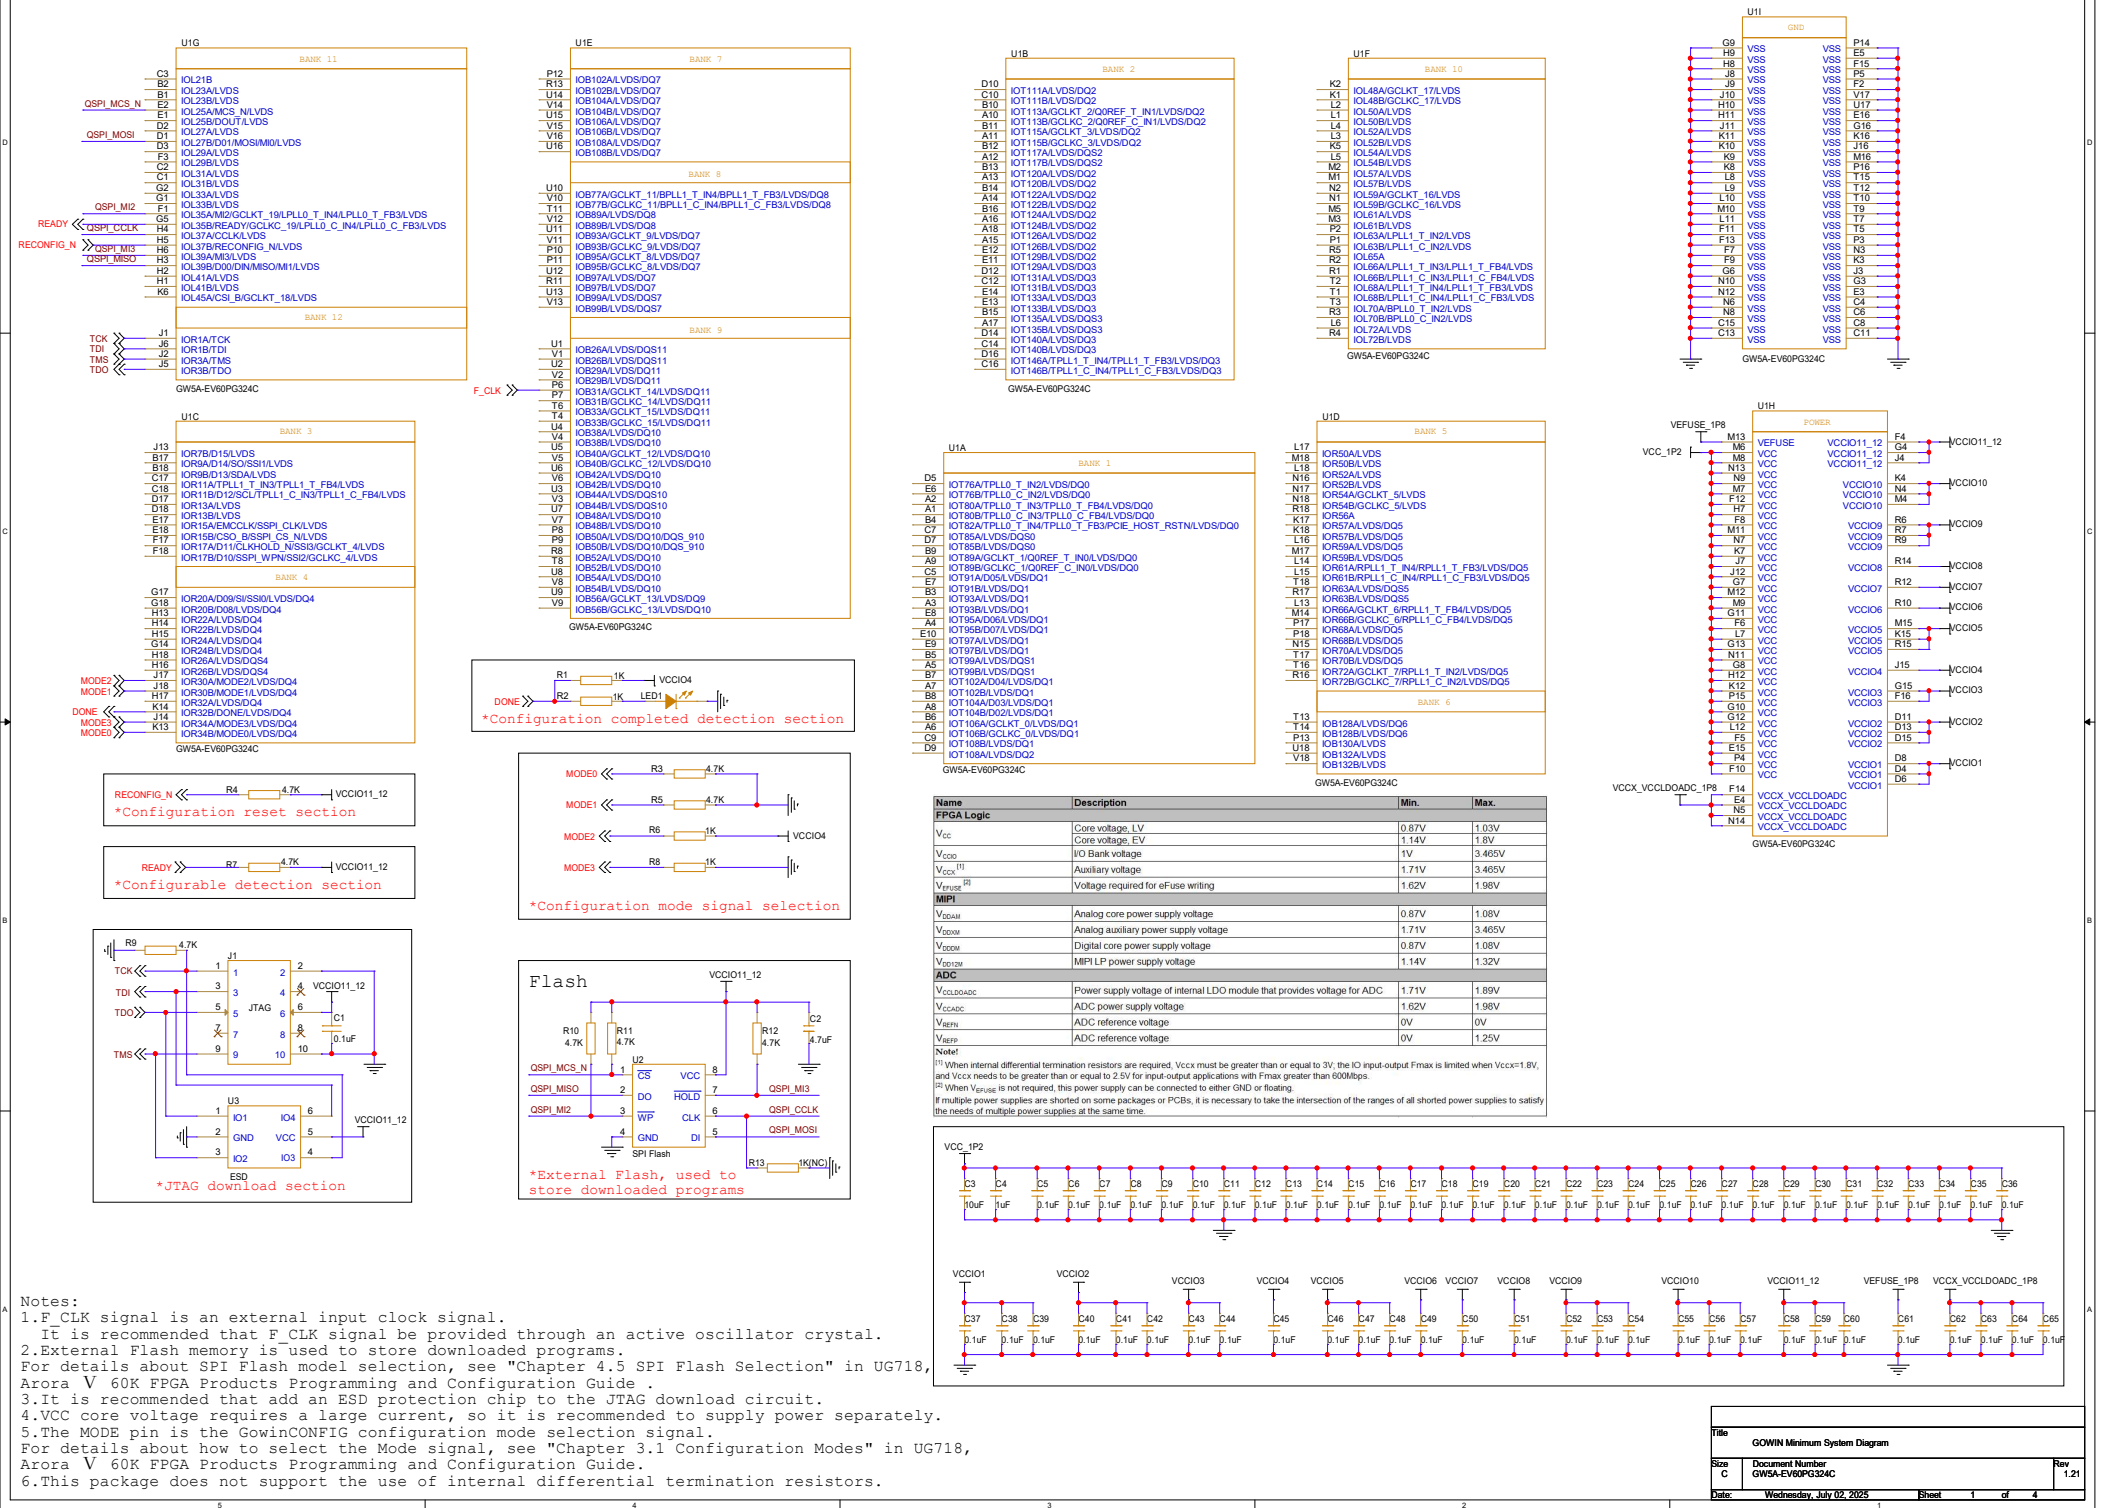

Notes:

1. F_CLK signal is an external input clock signal.
It is recommended that F_CLK signal be provided through an active oscillator crystal.
2. External Flash memory is used to store downloaded programs.
For details about SPI Flash model selection, see "Chapter 4.5 SPI Flash Selection" in UG718, Arora V 60K FPGA Products Programming and Configuration Guide .
3. It is recommended that add an ESD protection chip to the JTAG download circuit.
4. VCC core voltage requires a large current, so it is recommended to supply power separately.
5. The MODE pin is the GowinCONFIG configuration mode selection signal.
For details about how to select the Mode signal, see "Chapter 3.1 Configuration Modes" in UG718, Arora V 60K FPGA Products Programming and Configuration Guide.
6. This package does not support the use of internal differential termination resistors.

GW5A-EV60UG324S

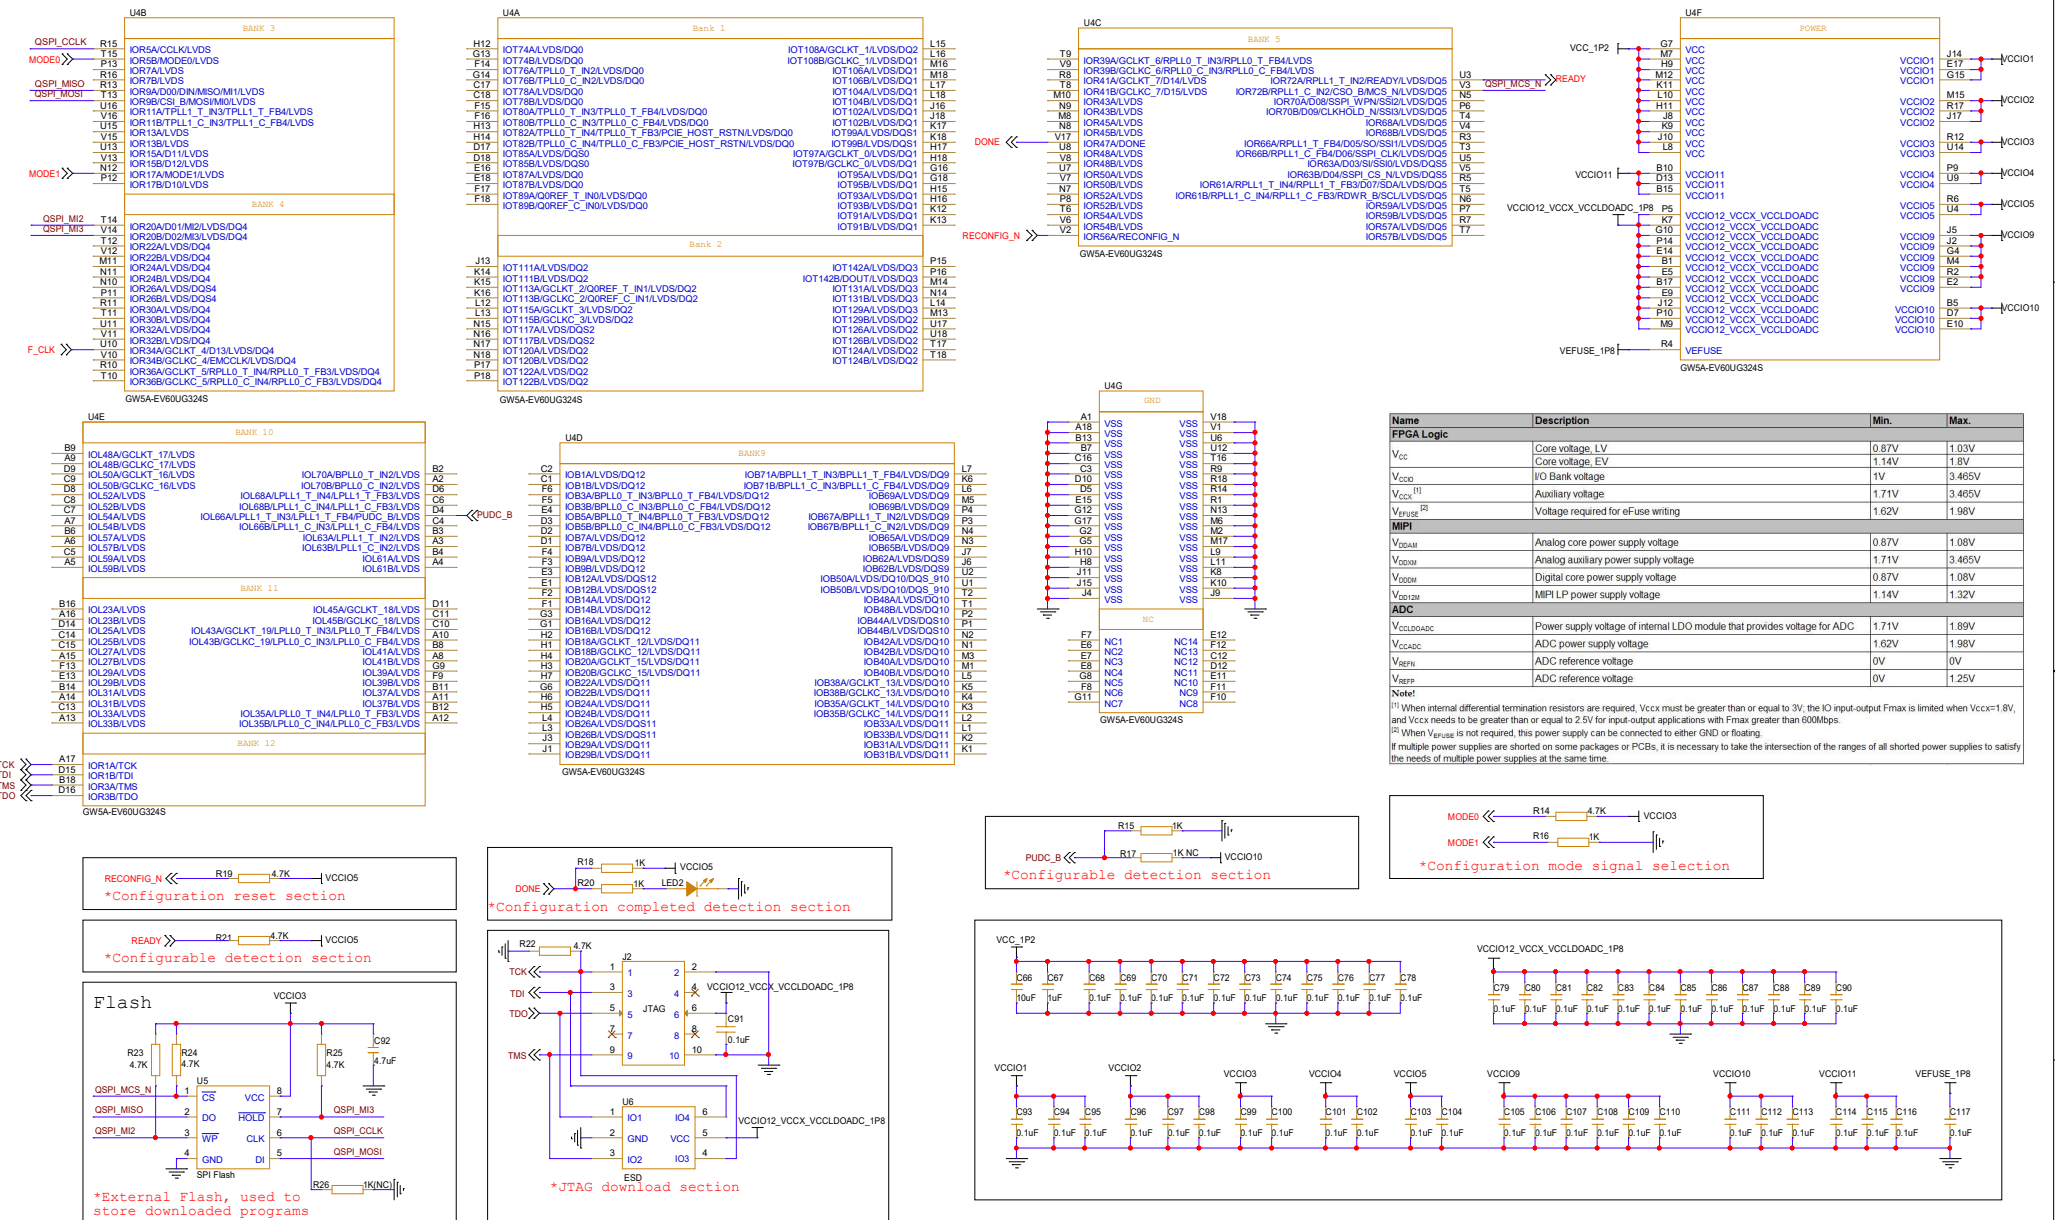


Notes:

- 1.F CLK signal is an external input clock signal.
It is recommended that F CLK signal be provided through an active oscillator crystal.
- 2.External Flash memory is used to store downloaded programs.
For details about SPI Flash model selection, see "Chapter 4.5 SPI Flash Selection" in UG718, Arora V 60K FPGA Products Programming and Configuration Guide .
- 3.It is recommended that add an ESD protection chip to the JTAG download circuit.
- 4.VCC core voltage requires a large current, so it is recommended to supply power separately.
- 5.The MODE pin is the GowinCONFIG configuration mode selection signal.
For details about how to select the Mode signal, see "Chapter 3.1 Configuration Modes" in UG718, Arora V 60K FPGA Products Programming and Configuration Guide.

Title			
GOWIN Minimum System Diagram			
Size	Document Number		Rev
C	GW5A-EV60UG324S		1.21
Issue	Wednesday, July 02, 2008	Sheet	2 of 4

GW5A-LV60UG324A

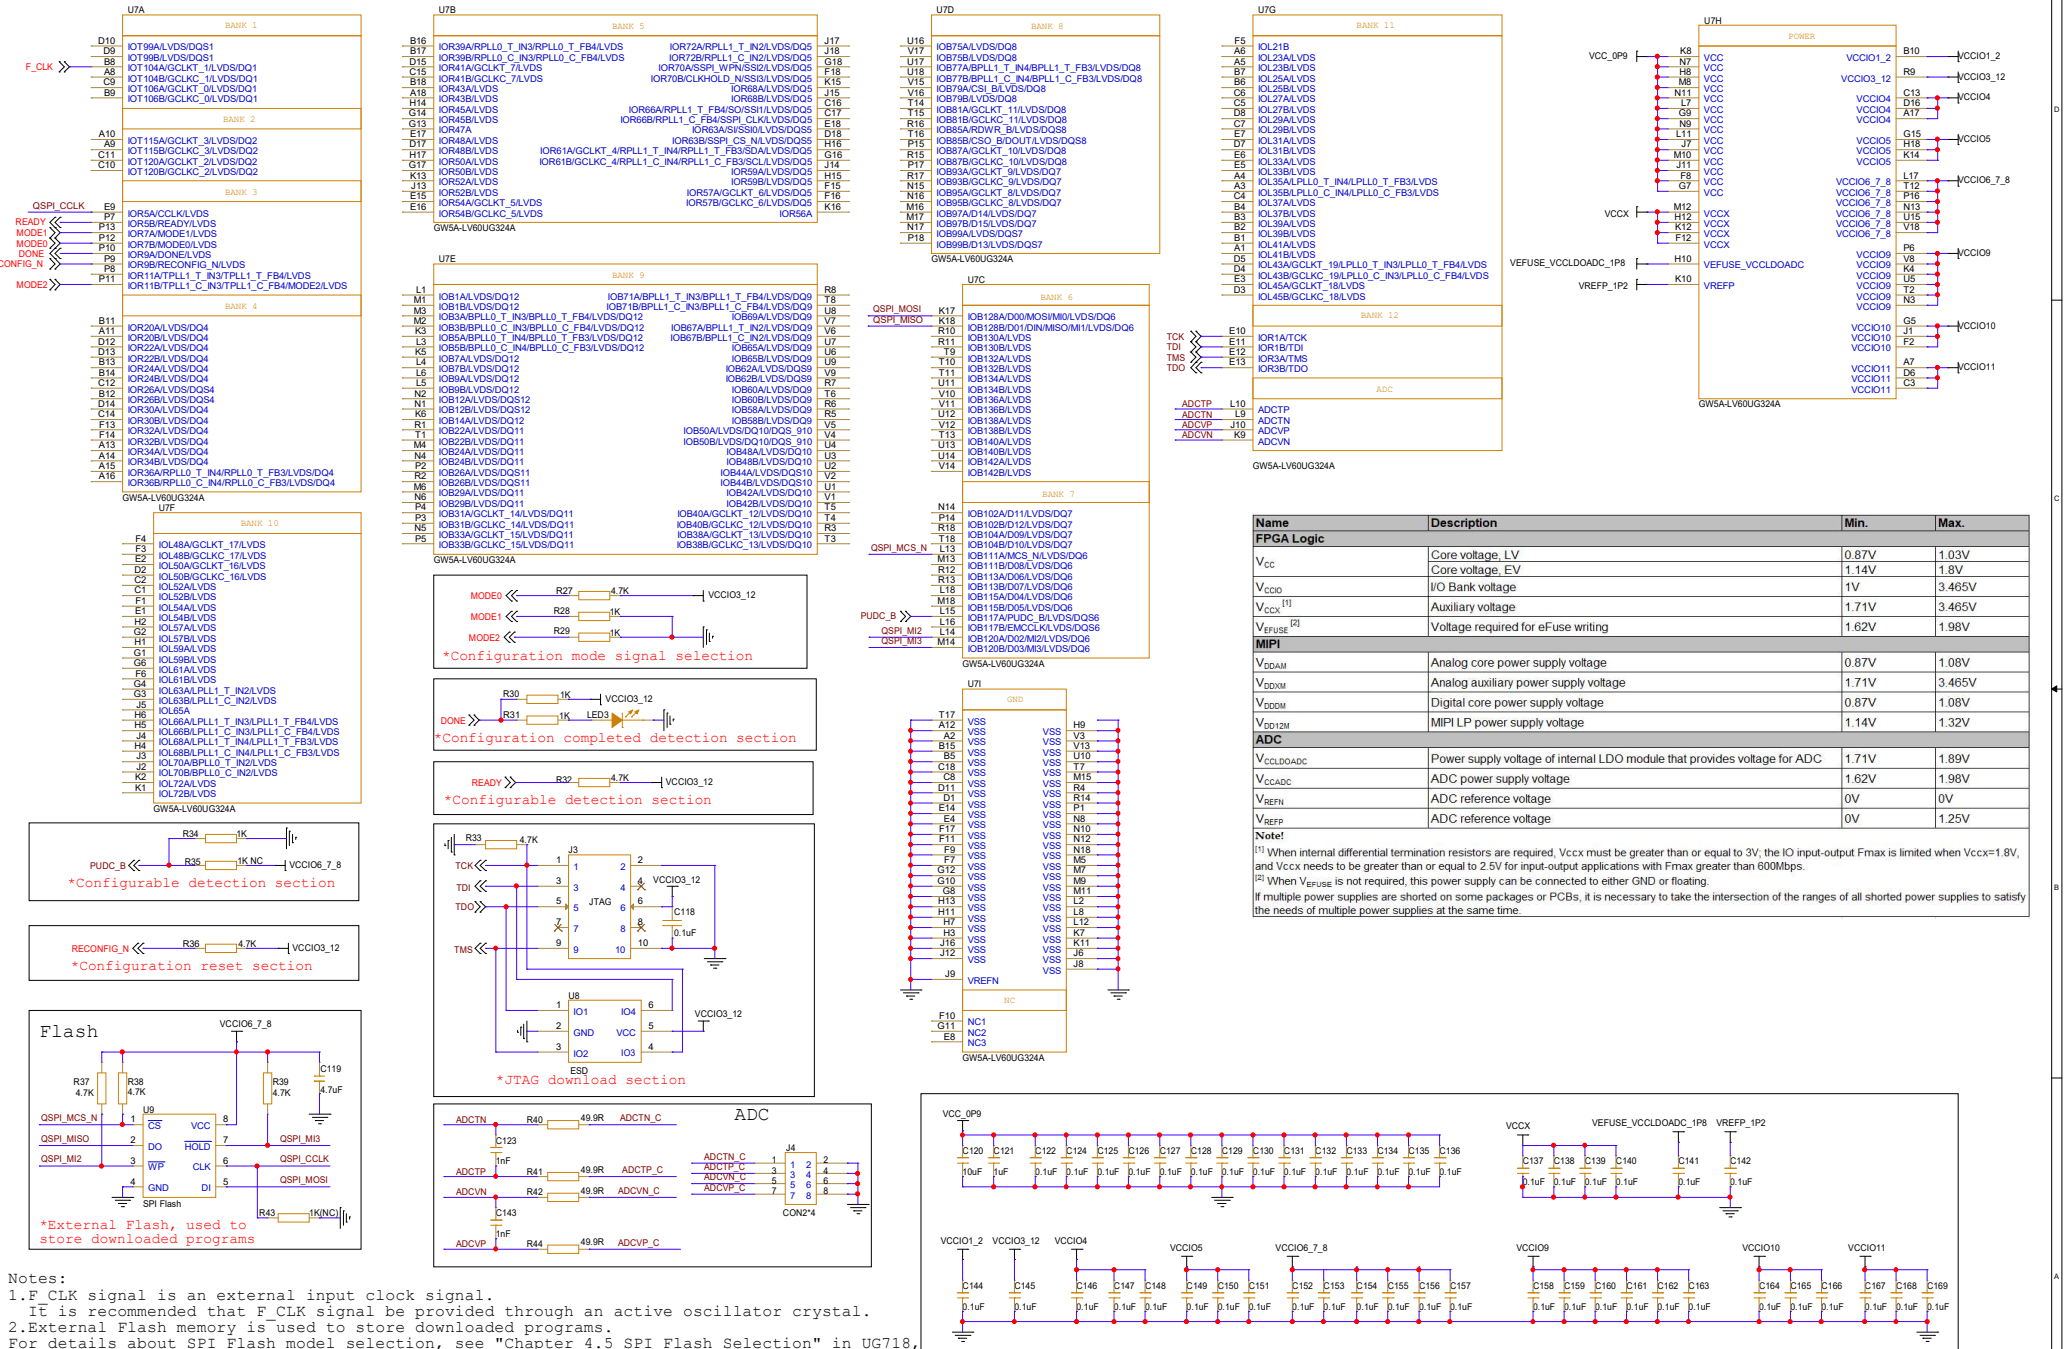

GW5A-1V60UG324S

