


GW5AS-EV25UG256

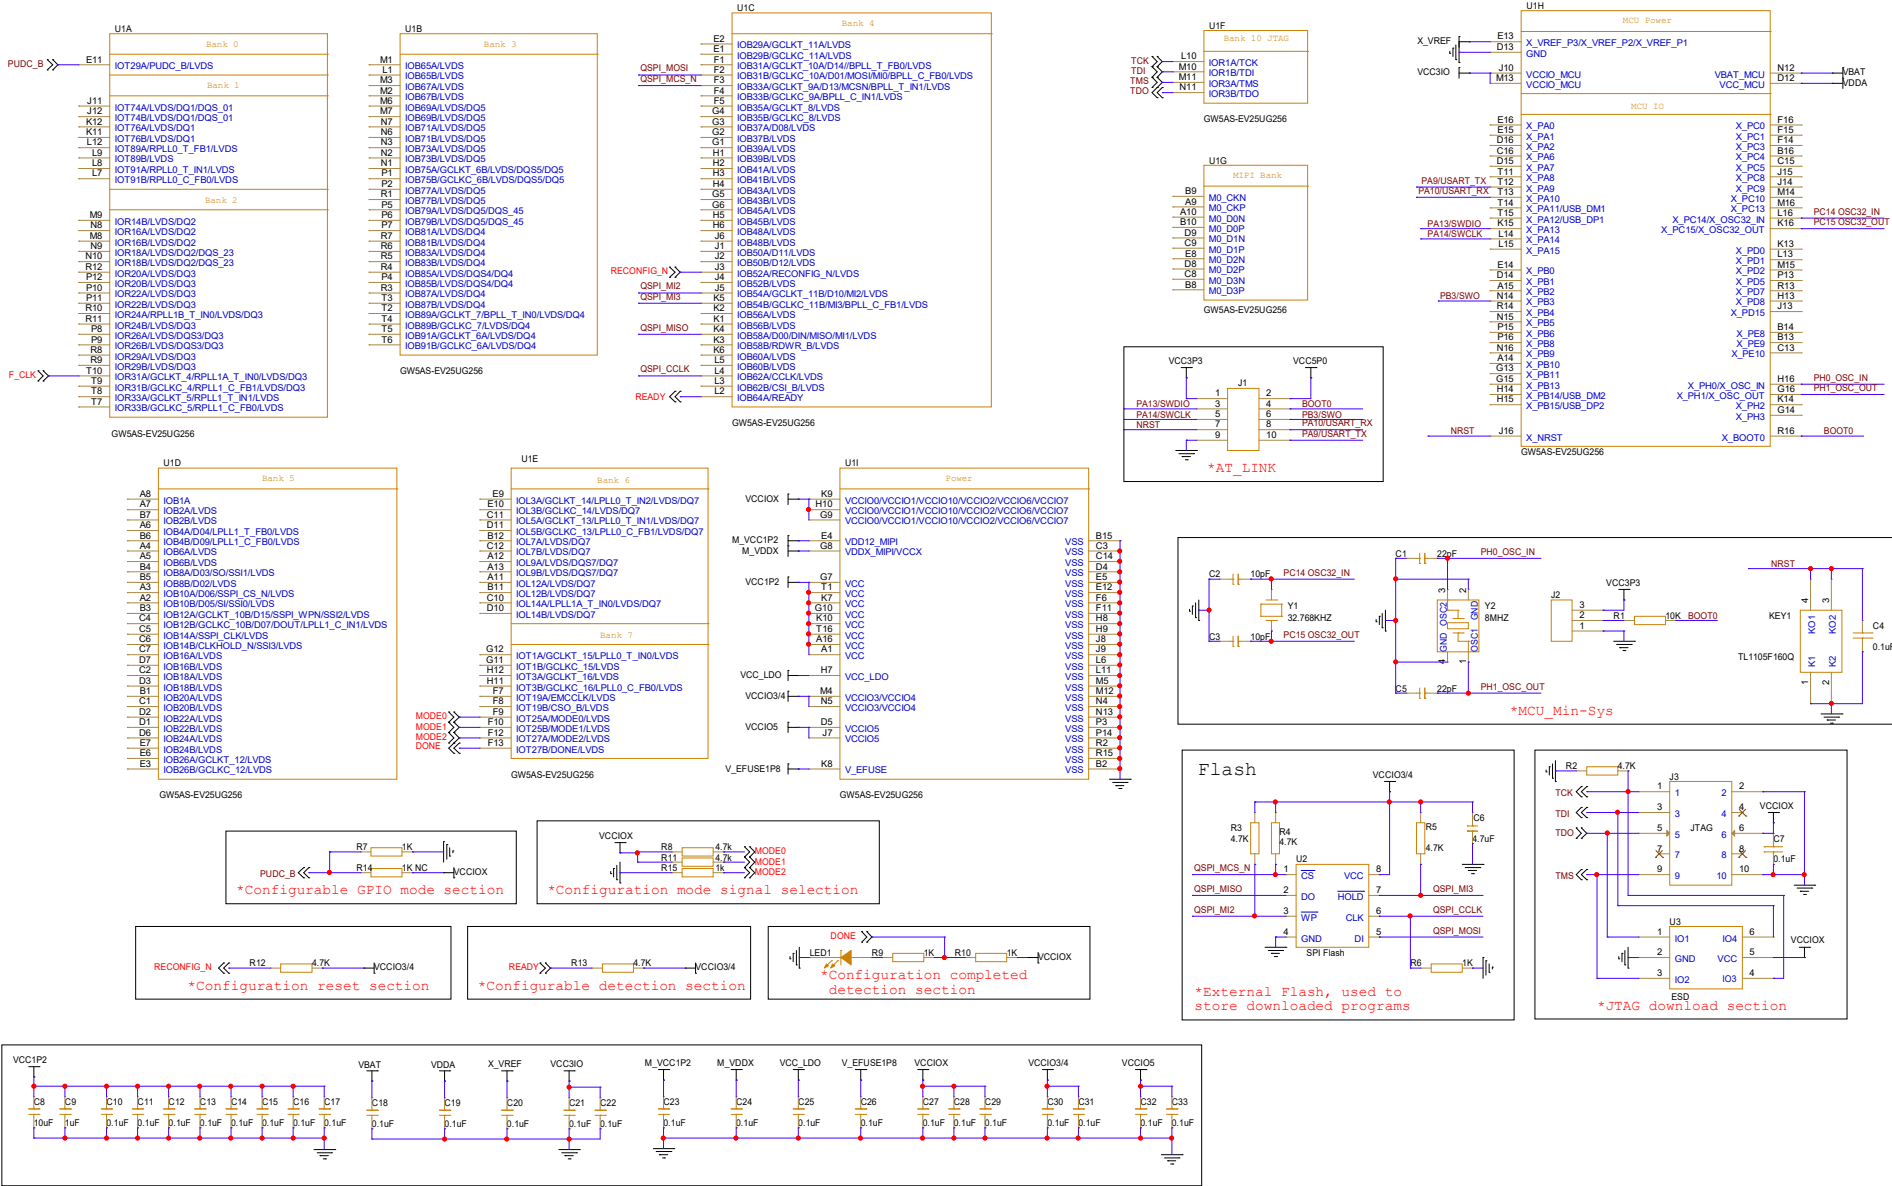

Notes:

1. F_CLK signal is an external input clock signal. It is recommended that F_CLK signal be provided through an active oscillator crystal.
2. External Flash memory is used to store downloaded programs.

For details about SPI Flash mode selection, see "Chapter 3.5 SPI Flash Selection" in UG714, Arara V 25K FPGA Products Programming and Configuration Guide.

3. It is recommended that add an ESD protection chip to the JTAG download circuit.
4. VCC core voltage requires a large current, so it is recommended to supply power separately.
5. The MODE pin is the GowinCONFIG configuration mode selection signal.

For details about how to select the Mode signal, see "Chapter 3.1 Configuration Modes" in UG714, Arara V 25K FPGA Products Programming and Configuration Guide.

Title			
GOWIN Minimum System Diagram			
Size	Document Number	Rev	
C	GW5AS-EV25UG256	2.2.1	
Date:	Tuesday, December 24, 2024	Sheet	1 of 1